



GUIDE TO MEDICAL HYBRID LIGHT-CURABLE MATERIALS



Only Dymax offers expert knowledge of light-cure technology, along with a full array of light-cure products. Dymax is committed to developing a true collaborative partnership — applying our extensive process knowledge to your specific application challenges.

We create custom solutions to ensure that chemistry and equipment work seamlessly together with maximum efficiency. Our application engineering team works side-by-side with our customers, providing assistance with formulation, testing, evaluation, and pre-production trials. Our laboratory is fully equipped to deliver mechanical or electrical testing, as well as specialty testing such as flowers of sulfur, salt spray, or thermal shock to ASTM standards. We also offer an extensive inventory of curing equipment, and manual and automated dispensing systems to help you achieve a more efficient, cost-effective manufacturing process.

Hybrid Light-Curable (HLC) Technology



Patented Light-Curable Materials with On-Contact Dark Area Cure Capability

Dymax HLC technology is a revolutionary new adhesive platform that combines the best attributes of anionic and free radical chemistries into one. HLC materials exhibit the exceptional physical and performance properties of Dymax standard light-curable materials and the rapid on-contact cure of anionics. The incorporation of contact curing allows these materials to be used with a larger range of substrates and provides curing in dark areas not reachable by light.

HLC materials are ideal for medical assemblies where dark areas are a concern, including bonding applications on catheters, tube sets, diagnostic and therapeutic devices, auto-injectors, and endoscopes.

Key Attributes

- Fast, tack-free cure with UV light - broad spectrum or LED
- Cures with very low intensity ($\sim 20 \text{ mW/cm}^2$)
- On-contact dark area cure capability
- Improved physical properties with low to no blooming after proper light cure
- Heat and humidity resistance
- Wicking-grade viscosity available for fast flow into tight-fitting assemblies
- ISO 10993 compliant
- Cold ship/storage

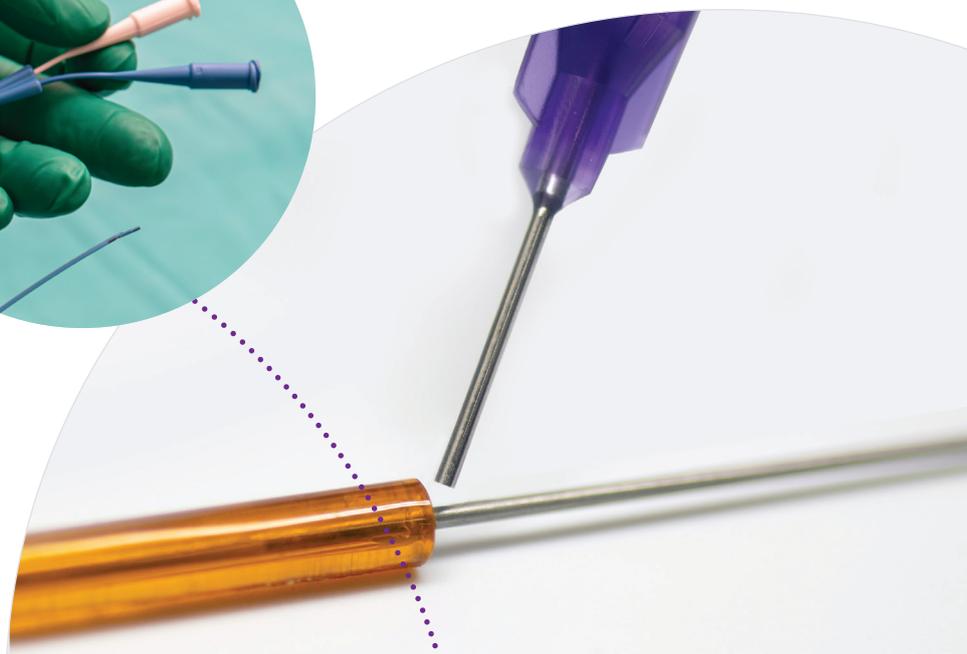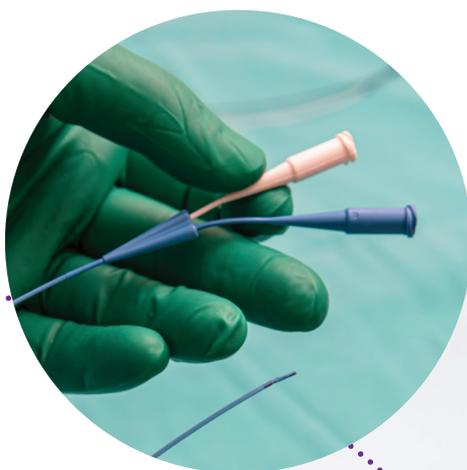

Why Choose HLC Materials?

Hybrid Light-Curable materials are an excellent choice for manufacturers looking to optimize their manufacturing processes. Fast light cure times increase production rates and reduce labor costs. The incorporation of contact curing into this technology allows one material to be used on a vast range of substrates and bond areas, eliminating the need for multiple chemistries and additional process steps. HLC materials also benefit from high performance and improved quality, reducing defects and ultimately waste and disposal costs.

- Eliminates the need for multiple chemistries and/or primers
- Increases throughput
- Streamlines process steps
- Eliminates wait time for dark area curing
- Reduces errors and defects

| Features | Dymax Light-Curable Material | Dymax HLC Material | Cyanoacrylate |
|---|---|---|---|
| Fast Cure Speeds | ✓ 100% cure in 1-30 seconds | ✓ Light cure in 1-30 seconds; Non-light fixture in 5-75 seconds | Fixture only in 10-60 seconds |
| Tack-Free Surface Cure | Specific formulas only; Can require high-intensity light cure | ✓ Tack free with low intensity light (20 mW/cm ²) <5 seconds | Specific formulas only ; Requires use of activators |
| Open Time (Time Before Cure Begins) | ✓ No cure until exposed to high-intensity light | 10-30 seconds | 10-30 seconds |
| Moisture Resistance | ✓ Some with excellent moisture resistance | ✓ Patented technology to increase moisture resistance | Not designed for high humidity or long-term moisture exposure |
| Temperature Resistance | ✓ Can withstand greater temperature extremes or a broader range of temperatures | ✓ Patented technology to increase temperature resistance | Not recommended for ≥225°F (107°C) |
| Opaque Substrate Bonding | Opaque substrates block UV and visible light | ✓ Not an issue | ✓ Not an issue |
| Impact Resistance | ✓ Grades range from flexible to rigid | ✓ Patented technology to reduce brittleness and increase impact resistance | Brittle with little impact resistance |
| Equipment | Light-curing equipment required | ✓ Equipment can be used to improve cure time and reduce crazing but not required for dark areas | ✓ No equipment required |
| Gap Cure | ✓ Typically recommended for 0.002"-0.25" (0.05-6.35 mm) with some formulas able to provide even larger gap curing | ✓ Can accommodate close gaps or larger bond gaps with light cure | Requires close contact |
| Blooming | ✓ None with proper cure | ✓ Low to no blooming after proper cure | Produces white haze around bond line during or after the cure |
| Stress Cracking | ✓ Rarely an issue with proper cure | ✓ Rarely an issue with proper cure | Tiny cracks in plastic can occur before or during the cure |
| Bondable Substrates | ✓ Bonds dissimilar substrates | ✓ Bonds dissimilar substrates | Does not typically bond dissimilar substrates |

Material Specifications & Performance

| Product | Features & Applications | Recommended Substrates | Nominal Viscosity, cP | Durometer Hardness | Modulus of Elasticity, MPa (psi) | Tensile at Break, MPa [psi] | Elongation at Break, % | Linear Shrinkage, % |
|------------|---|--|-----------------------|--------------------|----------------------------------|-----------------------------|------------------------|---------------------|
| HLC-M-1000 | Hybrid light and contact cure adhesive; low to no blooming with light cure; wicking grade viscosity; Passes ISO 10993 biocompatibility testing for medical device assembly* | ABS, PC, PCTG, PEBA, PETG, PMMA, PS, SAN, SS | 3 | D80 | 2,144.3 [311,000] | 49 [7,100] | 4 | 0.7 |

*Please see product data sheet for a complete list of biocompatibility testing.



Storage & Use Considerations

Storage between 2-8°C (35-46°F) is required. Storage below or above these temperatures can adversely affect product properties and shelf life. Once opened, maintaining storage between 10°C (50°F) and 21°C (70°F) in a low humidity, dark environment is recommended as this product may polymerize upon prolonged exposure to ambient and artificial light as well as moisture.

Unopened material should be allowed to reach room temperature before use. This may take approximately 20-60 minutes depending on the package size being used. The bottle should remain closed and sealed when not directly in use. Once opened, returning the material to refrigeration is not recommended. Once material has been removed from the original container, it may be contaminated and should not be returned to the original container.

Applying HLC Materials

Surface Preparation

For best adhesion, all bond surfaces should be clean and free from grease, mold release, or other contaminants prior to dispensing the adhesives. If your surfaces need to be cleaned, wipe them with acetone or Isopropyl Alcohol (IPA) to remove oils, grease, or contaminants.

Dispensing

Always utilize appropriate PPE (personal protective equipment) when working with any adhesive, including nitrile gloves, safety glasses, and ventilation.

Because this product cures with exposure to UV and visible light as well as moisture, exposure to light (ambient and artificial) and moisture should be kept to a minimum before curing. Dispensing components including needles and fluid lines should be 100% light blocking, not just UV blocking. Use of nitrogen or dry compressed air is recommended to eliminate moisture in dispensing lines.

Fluid paths must be evaluated for component compatibility. Known compatible and incompatible materials are listed in the table below. We recommend using polypropylene, polyethylene, PTFE, or PTFE-lining for all wetted parts in direct contact with the liquid adhesive in the dispensing equipment. Passivated stainless steel can be used in place of any metal parts that are in direct contact with liquid adhesive.

| ✓ Known Compatible Materials | X Known Incompatible Materials | |
|---|--------------------------------|--------------------------------|
| HDPE - High Density Polyethylene | Acetals | Mild Steel |
| HDPP - High Density Polypropylene | Aluminum | N-Butyl "O" Rings |
| Fluorinated Ethylene Propylene (FEP) Coated Gaskets | Brass | Non-Passivated Stainless Steel |
| Passivated Stainless Steel | Bronze | Nylon |
| PTFE - Polytetrafluoroethylene | Cast Iron | Polycarbonate |
| | Copper | Polyurethane |
| | Glass | PVC |
| | Hard Chrome | Silicone |
| | Magnetic Stainless Steel | Zinc |

If dispensing equipment needs to be cleaned or purged, fresh acetone or a similar aprotic solvent should be used.

| ✓ Polar Aprotic Solvents | X Polar Protic Solvents |
|--|-------------------------|
| Acetone | Acetic Acid |
| Butyl Acetate | Ammonia |
| Dimethyl Sulfoxide (DMSO) | Ethanol |
| Ethyl Acetate | Formic Acid |
| Hydroxymethylfurfural (HMF) | Hydrogen Fluoride |
| Methyl Ethyl Ketone (MEK) | Isopropyl Alcohol (IPA) |
| N,N-dimethylformamide (DMF) | Methanol |
| Propylene Glycol Monomethyl Ether Acetate (PM Acetate) | Water |

Available Dispensing Systems

Dymax offers two systems for easy dispensing of HLC materials - a system featuring a handheld dispensing pen and a system with a mountable dispensing valve that can be integrated into automated dispensing lines or used as a bench-top dispensing system. Both systems feature a pinch valve with a disposable fluid path. The disposable fluid path carries materials from the material reservoir to the dispense tip, sealing the fluid path and preventing contact with the valve's inner components to ensure a contaminant-free dispensing process. These dispensing systems also feature an adjustable flow control so materials are dispensed consistently and accurately.

| | HLC Dispense System Kits | |
|---------------------------|--|--|
| | Dispensing Pen System | Model 455 System |
| Valve Type | Handheld | Mountable |
| Dispensing Valve | HLC Dispense Pen | Model 455 |
| Material Reservoir | Mini Drop-In Pressure Tank | Mini Drop-In Pressure Tank |
| Activation | Manual Pinch | DVC-345 |
| Tubing Size/Material | 0.095" PE & 0.095" PTFE | 0.095" PTFE |
| Features | <ul style="list-style-type: none"> • Compact and lightweight for comfortable handheld operation • Ideal for continuous or micro-shot applications • Built-in flow adjustment for precise control over dispensing volumes and shot-to-shot consistency • No controller or electricity needed • Disposable fluid path for contaminant-free dispensing and easy product changeover | <ul style="list-style-type: none"> • Easily integrated into automated lines or can be used as a bench-top dispensing station • Stroke adjustment for precise control over dispensing volumes and shot-to-shot consistency • DVC-345 controller provides precise and consistent valve actuation without complex programming • Cycle time may be set in a range from .01 to 9.99 seconds in .01 second increments • Disposable fluid path for contaminant-free dispensing and easy product changeover |
| System Part Number | T40648 ¹ | T40665 ² |
| Accessories & Spare Parts | T40647 HLC Pen Dispense Spare Kit T40627 Pen Dispense Valve Only | T18376 Fluid Line, 0.095" P3232 Tip Kit, 18 GA, 1.25" |

¹ Includes a HLC dispense pen valve, mini drop-in pressure tank, 60g bottle nest, air precision regulator with stand assembly, syringe stand, fluid line kit, air line kit, and tip kit.

² Includes a Model 455 valve, mini drop-in pressure tank, 60g bottle nest, air precision regulator with stand assembly, syringe stand, complete DVC-345 controller, wye adapter, fluid line kit, air line kit, and tip kit.



HLC Dispensing Pen System



HLC Model 455 System

Curing HLC Materials

HLC adhesives feature on-contact cure capability for dark areas not reachable by light as well as rapid, low-intensity curing with UV or visible light. Using a combination of both cure types will allow the adhesive to achieve its best performance. The material is compatible with all wavelengths, but has been optimized for 405 nm LED cures, achieving excellent strength at that wavelength.

Curing with Contact

Cure rate is dependent upon many variables including substrate cleanliness, porosity, and required depth of cure. The cure times reported are based on lab results and are intended for reference only. Testing was performed using a 250 mm² (0.39 in²) bond area and represents the time required for the bond to support a 3kg (6.6 lb) weight for 10 seconds at 22°C/50% R.H.

| Substrates | Non-UV Fixture Time |
|---------------------------------------|---------------------|
| | HLC-M-1000 |
| ABS - ABS | 5-15s |
| Aluminum - Aluminum | 10-20s |
| PC - PC | 60-70s |
| PMMA - PMMA | 25-35s |
| PVC - PVC | 25-35s |
| Stainless Steel - Stainless Steel | 65-75s |
| Cold Rolled Steel - Cold Rolled Steel | 55-65s |

Curing with Light

Cure rate is dependent upon many variables including lamp intensity, distance from the light source, and required depth of cure. The cure times reported are based on lab results and are intended for reference only. Testing was performed using a 0.127 mm (0.005") thickness and measured based on the time to achieve a tack-free surface.

| Dymax Curing System (intensity) | Tack-Free Time ^A |
|---|-----------------------------|
| | HLC-M-1000 |
| 5000-EC (200 mW/cm ²) ^B | 1.0s |
| BlueWave [®] MX-250 RediCure [®] 365 nm (255 mW/cm ²) ^C | 0.4s |
| BlueWave [®] MX-250 PrimeCure [®] 385 nm (355 mW/cm ²) ^C | 0.4s |
| BlueWave [®] MX-250 VisiCure [®] 405 nm (375 mW/cm ²) ^C | 0.4s |
| BlueWave [®] 200 (10 W/cm ²) ^B | 0.2s |
| BlueWave [®] MX-150 RediCure [®] 365 nm (10 W/cm ²) ^C | 0.2s |
| BlueWave [®] MX-150 PrimeCure [®] 385 nm (15 W/cm ²) ^C | 0.2s |
| BlueWave [®] MX-150 VisiCure [®] 405 nm (15 W/cm ²) ^C | 0.2s |

A Tack-free times/belt speeds are based on a 0.127 mm thickness coating when cured with the noted Dymax cure systems.


B Intensity was measured over the UVA range (320-395 nm) using a Dymax ACCU-CAL™ 50 Radiometer.

C Intensity was measured over the UVA/Visible range (350-450 nm) using a Dymax ACCU-CAL™ 50-LED Radiometer.

Low Intensity Tack-Free Cure

HLC-M-1000 also has the unique ability to cure tack free with low intensity. The cure times reported below are based on lab results and are intended for reference only. Testing was performed using a 5 mil / 0.125 mm (0.005") thickness.

| Wavelength | @ 20 mW/cm ² | @ 100 mW/cm ² |
|----------------|-------------------------|--------------------------|
| Broad Spectrum | 1 sec | 1 sec |
| 365 nm LED | 1 sec | 0.4 sec |
| 385 nm LED | 1 sec | 0.4 sec |
| 405 nm LED | 1 sec | 0.4 sec |



Recommended Curing Systems

Dymax light-curing systems are perfectly matched to our adhesives' chemistry. We offer a complete line of UV broad-spectrum and UV LED light-curing equipment including spot, flood, and conveyor systems, as well as radiometers for measuring light intensity. Our equipment can be configured as stand-alone units or integrated into existing manufacturing assembly lines for fast processing. Visit the dymax.com website for a complete listing of our equipment.



BlueWave® MX-Series LED Curing Systems

BlueWave MX-Series curing systems feature all the benefits of LED-curing technology in smaller, more versatile units. These systems are uniquely designed to offer higher, more consistent curing intensity than traditional spot or flood curing systems.

- Compact, easy-to-use control interface
- Flood, spot, and line pattern models
- 365, 385, and 405 nm wavelength emitters
- Can be easily mounted into automated lines or used as bench-top units.

BlueWave® QX4 LED Spot Lamp

The BlueWave QX4 high-intensity spot-curing system is comprised of a controller and up to four LED heads. LED heads can be controlled through the system's variable mode, a feature that allows each head to be individually programmed for intensity and cycle times.

- 365, 385, and 405 nm wavelength LED heads with three different size focusing lens available.
- Activated by touchscreen, foot pedal, or through an I/O interface connection, allowing it to be easily incorporated into automated systems.


BlueWave® FX-1250 LED Flood Lamps

The BlueWave FX-1250 delivers true, high-irradiance LED light for better speed, depth, and fullness of cure. It is comprised of a controller and up to two LED emitters. The system combines intensities of over 2 W/cm² with a 5" x 5" (12.7 cm x 12.7 cm) curing area and high uniformity for exceptional cure performance.

- 365, 385, and 405 nm wavelength emitters
- Easy-to-use controller interface with 7" touch screen
- Can be activated, controlled, and remotely monitored by PLC for automated lines
- Controller stores programs and parameters for repeatable processes and continuously monitors the health of the system

System Integration Services

Our Systems Integration Team works with manufacturers across various industries that are looking for automated and robotic dispensing and curing solutions for all size processes, from bench-top assemblies to standalone stations or sub-assemblies within larger production lines. They work with manufacturers to fully understand their manufacturing goals and to provide individualized solutions suitable for each application and budget. Our system integrations team draws upon Dymax technology but also collaborates with industry leading automation organizations.

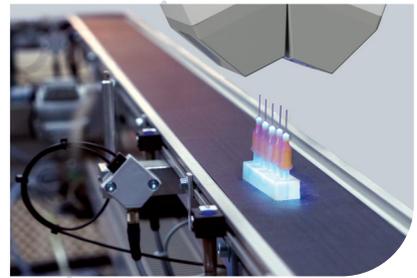

Our Commitment to Greener, Safer Manufacturing

Dymax is committed to green manufacturing that reduces environmental impact, conserves energy, and provides greater worker safety. Over the last 40 years, our light-curable materials and curing equipment have become the industry standard for fast, environmentally conscious assembly. Dymax products are readily replacing technologies that contain hazardous ingredients, produce waste, or require higher amounts of energy to process.



Eco-friendly, one-component materials



Materials without solvents and other materials of concern for improved worker and user safety



Fast curing products and LED equipment designed for less energy consumption



Dymax products conform to regulatory standards like RoHS and REACH



www.dymax.com

Americas

USA | +1.860.482.1010 | info@dymax.com

Europe

Germany | +49 611.962.7900 | info_de@dymax.com
Ireland | +353 21.237.3016 | info_ie@dymax.com

Asia

Singapore | +65.67522887 | info_ap@dymax.com
Shenzhen | +86.755.83485759 | info@hanarey.com
Hong Kong | +852.2460.7038 | dymaxasia@dymax.com
Korea | +82.31.608.3434 | info_kr@dymax.com

©2023 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A.

Technical data provided is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use, is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide.

SG031DA 06/1/2023